

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 0 992 589 A2**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
12.04.2000 Bulletin 2000/15

(51) Int. Cl.⁷: **C12Q 1/00, G01N 27/327**

(21) Application number: 99119014.1

(22) Date of filing: 28.09.1999

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: 29.09.1998 JP 27615398
27.07.1999 JP 21270399

(71) Applicant:
MATSUSHITA ELECTRIC INDUSTRIAL CO., LTD.
Kadoma-shi, Osaka 571-8501 (JP)

(72) Inventors:
• **Yugawa, Keiko**
Nara-shi, Nara 631-0041 (JP)
• **Yoshioka, Toshihiko**
Hirakata-shi, Osaka 573-0035 (JP)


• **Nankai, Shiro**
Hirakata-shi, Osaka 573-0071 (JP)
• **Iwata, Junko**
Onsen-gun, Ehime 791-0221 (JP)
• **Miyazaki, Shoji**
Matsuyama-shi, Ehime 791-8032 (JP)
• **Baba, Hideyuki**
Matsuyama-shi, Ehime 790-0923 (JP)
• **Takeshima, Seiji**,
c/o Toyo Boseki Kabushiki Kaisha
Tsuruga-shi, Fukui 914-0047 (JP)

(74) Representative:
Dr. Elisabeth Jung
Dr. Jürgen Schirdewahn
Dipl.-Ing. Claus Gernhardt
Clemensstrasse 30
80803 München (DE)

(54) **Glucose sensor**

(57) The present invention provides a high performance glucose sensor which can demonstrate high stability against preservation and produces only a low blank value. The glucose sensor comprises an electrically insulating base plate, an electrode system formed on the base plate, and a reaction layer which is formed in contact with or in the vicinity of the electrode system and contains at least a glucose dehydrogenase whose coenzyme is pyrrolo-quinoline quinone, the reaction layer further containing an additive such as phthalic acid.

FIG. 1

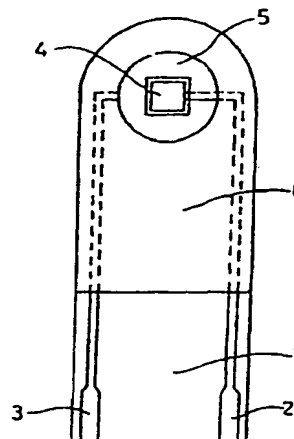

EP 0 992 589 A2

Description

BACKGROUND OF THE INVENTION

5 [0001] The present invention relates to a glucose sensor which facilitates rapid and simplified quantitative analysis of a specific component contained in a sample with high accuracy. More specifically, the present invention relates to a method for stabilizing glucose dehydrogenase whose coenzyme is pyrrolo-quinoline quinone and a glucose dehydrogenase composition obtained by the stabilizing method.

10 [0002] Conventionally, a variety of biosensor have been proposed as a system facilitating simple quantitation of a specific component contained in a sample solution without requiring dilution or agitation of a sample solution. The following is a known example of such biosensor (Japanese Laid-Open Patent Publication No. Hei 2-062952).

[0003] The biosensor disclosed in this prior art is produced by the steps of forming an electrode system including a working electrode, a counter electrode and a reference electrode on an electrically insulating base plate using a known screen printing method or the like and subsequently forming immediately on this electrode system an enzyme reaction layer containing a hydrophilic polymer, an oxidoreductase, and an electron acceptor.

15 [0004] Upon a dropwise addition of a sample solution containing a substrate over the enzyme reaction layer of the biosensor thus produced, the enzyme reaction layer dissolves in the sample solution and the substrate in the sample solution is oxidized by the enzyme. At that time, the electron acceptor is reduced. After enzyme reaction is completed, the reduced electron acceptor is electrochemically reoxidized. The concentration of the substrate in the sample solution can be determined based on the oxidation current produced by the reoxidation reaction.

[0005] In principle, the biosensor as described above permits measurements of various materials if a suitable enzyme corresponding to the substrate of an analyte is selected.

[0006] For example, if glucose oxidase is the selected enzyme, then a glucose sensor for measuring a glucose concentration in the sample solution can be obtained.

25 [0007] The biosensor of the above structure normally accommodates the enzyme in the dried state. However, the enzyme is susceptible to degeneration when exposed to water in air for a long time, because it is essentially composed of protein which is readily degraded. In the extreme, the enzyme is exposed to a risk of losing the enzyme activity.

[0008] Therefore, long-term preservation of sensors after their production may result in a loss of activity of the enzyme and a depletion of necessary enzyme for reacting with the substrate. This may lead to a noncommensurable sensor response current to the substrate concentration.

30 [0009] In general, introduction of a sample solution containing a 0% substrate can produce some degree of sensor response current (hereinafter referred to as "blank value"). One cause of such blank value may be induction of electrode reaction due to an accumulation of ions contained in the sample solution dissolving the reaction layer on the surface of the electrode system formed on the base plate. A large blank value can serve as a factor for impairing the correlation between response current and substrate concentration, rendering it impossible to make precise quantitative analysis of the substrate.

[0010] Therefore, securing an environment where the enzyme can retain the enzyme activity for a long term in the vicinity of the enzyme is key to the provision of a biosensor demonstrating excellent stability against preservation and producing a low blank value. It is also important to secure an environment, which produces a minimal and negligible blank value, around the surface of the electrode system on the base plate. It is also necessary to realize smooth transfer of both electron and substrate around enzyme reaction so as to enhance sensor response.

[0011] One conventional countermeasure for solving the above-mentioned problems is an inclusion of an additive such as phosphoric acid in the reaction layer.

45 [0012] In order to produce a high performance glucose sensor, on the other hand, glucose dehydrogenase whose coenzyme is pyrrolo-quinoline quinone (hereinafter abbreviated to "PQQ-GDH") has conventionally been used as the enzyme. If PQQ-GDH is included as the enzyme, the resultant glucose sensor inherently has a characteristic feature of complete freedom from any adverse influence of dissolved oxygen in blood or the like on the enzyme reaction, because oxygen plays no role in the catalytic action of PQQ-GDH. Therefore, measurement values obtained from such glucose sensor are also free of variations due to oxygen partial pressure in the sample solution. This means that a high performance sensor will result from the use of PQQ-GDH as the enzyme.

50 [0013] However, the use of PQQ-GDH as the enzyme has a drawback that even inclusion of an additive such as phosphoric acid as exemplified before in the reaction layer can not help the resultant biosensor to lower the blank value sufficiently and to demonstrate sufficiently high stability against preservation.

55 BRIEF SUMMARY OF THE INVENTION

[0014] In view of the above-mentioned problems, a primary object of the present invention is to provide a high performance glucose sensor demonstrating high stability against preservation and producing a low blank value. Other

objects of the present invention are to provide a method for stabilizing PQQ-GDH and a glucose dehydrogenase composition obtained by the stabilizing method.

[0015] The glucose sensor in accordance with the present invention comprises an electrically insulating base plate, an electrode system including at least a working electrode and a counter electrode formed on the base plate, and a reaction layer which is formed in contact with or in the vicinity of the electrode system and contains at least PQQ-GDH, wherein the reaction layer further contains at least one additive selected from the group consisting of phthalic acid, a phthalate, maleic acid, a maleate, succinic acid, a succinate, triethanol amine, a triethanol amine salt, citric acid, a citrate, dimethyl glutaric acid, 2-(N-morpholino)ethane sulfonic acid, a 2-(N-morpholino)ethane sulfonate, tris (hydroxymethyl)glycine, a tris (hydroxymethyl)glycine salt, tris(hydroxymethyl)aminomethane, a tris(hydroxymethyl)aminomethane salt, imidazole, and colicin.

[0016] In a preferred mode of the present invention, the enzyme is coated with the additive.

[0017] The present invention also relates to a method for stabilizing glucose dehydrogenase for use in glucose sensors, wherein at least one additive is added to PQQ-GDH, the additive being selected from the group consisting of phthalic acid, a phthalate, maleic acid, a maleate, succinic acid, a succinate, triethanol amine, a triethanol amine salt, citric acid, a citrate, dimethyl glutaric acid, 2-(N-morpholino)ethane sulfonic acid, a 2-(N-morpholino)ethane sulfonate, tris (hydroxymethyl) glycine, a tris(hydroxymethyl)glycine salt, tris(hydroxymethyl)aminomethane, a tris(hydroxymethyl)aminomethane salt, imidazole, and colicin.

[0018] The present invention further relates to a glucose dehydrogenase composition for use in glucose sensors, the composition containing PQQ-GDH and at least one additive selected from the group consisting of phthalic acid, a phthalate, maleic acid, a maleate, succinic acid, a succinate, triethanol amine, a triethanol amine salt, citric acid, a citrate, dimethyl glutaric acid, 2-(N-morpholino)ethane sulfonic acid, a 2-(N-morpholino)ethane sulfonate, tris(hydroxymethyl)glycine, a tris(hydroxymethyl)glycine salt, tris(hydroxymethyl)aminomethane, a tris(hydroxymethyl)aminomethane salt, imidazole, and colicin.

[0019] While the novel features of the invention are set forth particularly in the appended claims, the invention, both as to organization and content, will be better understood and appreciated, along with other objects and features thereof, from the following detailed description taken in conjunction with the drawings.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWING

[0020]

FIG. 1 is a schematic plan view illustrating a glucose sensor in accordance with one example of the present invention from which the reaction layer has been omitted.

FIG. 2 is a longitudinal cross-sectional view illustrating the vital parts of the glucose sensor shown in FIG. 1.

FIG. 3 is a graph illustrating response characteristics obtained from a glucose sensor in accordance with Example 1 of the present invention and those from a glucose sensor in accordance with Comparative Example 1.

FIG. 4 is a graph illustrating response characteristics obtained from a glucose sensor in accordance with Example 3 of the present invention and those from the glucose sensor in accordance with Comparative Example 1.

FIG. 5 is a graph illustrating response characteristics obtained from a glucose sensor in accordance with Example 4 of the present invention and those from the glucose sensor in accordance with Comparative Example 1.

FIG. 6 is a graph illustrating response characteristics obtained from a glucose sensor in accordance with Example 5 of the present invention and those from the glucose sensor in accordance with Comparative Example 1.

FIG. 7 is a graph illustrating response characteristics obtained from a glucose sensor in accordance with Example 6 of the present invention and those from the glucose sensor in accordance with Comparative Example 1.

FIG. 8 is a graph illustrating response characteristics obtained from a glucose sensor in accordance with Example 7 of the present invention and those from the glucose sensor in accordance with Comparative Example 1.

FIG. 9 is a graph illustrating response characteristics obtained from a glucose sensor in accordance with Example 8 of the present invention and those from the glucose sensor in accordance with Comparative Example 1.

FIG. 10 is a graph illustrating response characteristics obtained from a glucose sensor in accordance with Example 9 of the present invention and those from the glucose sensor in accordance with Comparative Example 1.

FIG. 11 is a graph illustrating response characteristics obtained from a glucose sensor in accordance with Example 10 of the present invention and those from the glucose sensor in accordance with Comparative Example 1.

DETAILED DESCRIPTION OF THE INVENTION

[0021] As noted above, the glucose sensor in accordance with the present invention further contains an additive such as phthalic acid in the reaction layer containing PQQ-GDH as the enzyme.

[0022] When the reaction layer is formed by dropping and drying an aqueous mixed solution of PQQ-GDH with the

additive such as hydrogen potassium phthalate, for example, the surface of the enzyme PQQ-GDH is coated with the additive hydrogen potassium phthalate. Such coating protects the enzyme from any change in the environmental conditions such as temperature, humidity, electric charge. As a result, the enzyme can retain stable enzyme activity for a long term.

[0023] Furthermore, upon introduction of a sample solution into the sensor, the additive is dissolved in the sample solution and ionized. The ionized additive in turn influences preexisting ions in the sample solution and those produced upon dissolution of the reaction layer in the sample solution. As a result, those ions can not stay on the surface of the electrode system on the base plate, which contributes to minimizing the blank value.

[0024] The presence of such additive in the reaction layer is also technically advantageous in that it helps dissolution of the reaction layer in water, which facilitates immediate dissolution of the reaction layer in the sample solution upon addition of the sample solution to the reaction layer, thereby enabling smooth progress of both enzyme reaction and electrode reaction.

[0025] The additive from which the above-mentioned effects can be expected may be exemplified as phthalic acid, a phthalate such as potassium hydrogen phthalate, maleic acid, a maleate such as sodium maleate, succinic acid, a succinate such as sodium succinate, triethanol amine, a triethanol amine salt such as triethanol amine hydrochloride, citric acid, a citrate such as monopotassium citrate, calcium citrate, tripotassium citrate, sodium citrate, trilithium citrate, diammonium hydrogen citrate, disodium hydrogen citrate, sodium citrate, diammonium citrate, potassium dihydrogen citrate, sodium dihydrogen citrate, disodium citrate or magnesium citrate, dimethyl glutaric acid, 2-(N-morpholino)ethane sulfonic acid, a 2-(N-morpholino)ethane sulfonate, tris (hydroxymethyl)glycine, a tris (hydroxymethyl) glycine salt, tris(hydroxymethyl)aminomethane, a tris(hydroxymethyl)aminomethane salt such as tris(hydroxymethyl)aminomethane hydrochloride, imidazole, and colicin.

[0026] Particularly, the use of potassium hydrogen phthalate as the additive produces a glucose sensor exhibiting excellent stability against preservation and superb response characteristics with a very low blank value.

[0027] All of the above exemplified additives are compounds which can serve as buffers. At use, they can be adjusted to a desired pH using an acid such as hydrochloric acid, acetic acid or an alkali such as sodium hydroxide, potassium hydroxide if occasion demands. A preferred pH range is 5.0 to 8.5. Those additives may be dissolved in other appropriate buffer solutions at use.

[0028] The ratio of the additive may be in a range of 5 to 80 μM per 250 to 10,000 U (= units)/ml of PQQ-GDH. From the aspects of stability and blank value, namely, due to the reason that excess content of the additive decreases specific activity of the enzyme, a preferred ratio of the additive should be in a range of 10 to 50 μM .

[0029] According to the present invention, the reaction layer may further contain such electron acceptor that is reduced by enzyme reaction. Applicable electron acceptor for this purpose may be exemplified as ferricyanide ion, p-benzoquinone and a derivative thereof, phenazine methosulphate, methylene blue, ferrocene and a derivative thereof, and the like.

[0030] According to the present invention, the reaction layer may further include a hydrophilic polymer. The presence of a hydrophilic polymer in the reaction layer prevents separation or dissection of the reaction layer from the surface of the electrode system. The hydrophilic polymer also has a preventive effect against crack development on the surface of the reaction layer, thereby enhancing the reliability of the resultant biosensor.

[0031] Preferred examples of hydrophilic polymer for this purpose include carboxymethyl cellulose, hydroxyethyl cellulose, hydroxypropyl cellulose, methyl cellulose, ethyl cellulose, ethylhydroxyethyl cellulose, carboxymethylethyl cellulose, polyvinyl pyrrolidone, polyvinyl alcohol, polyamine such as polylysine, polystyrene sulfonate, gelatin and a derivative thereof, a polymer of acrylic acid and its acrylate, a polymer of methacrylic acid and a methacrylate, starch and a derivative thereof, a polymer of maleic anhydride and a maleate, agarose gel and a derivative thereof.

[0032] The reaction layer may be located at various sites in the biosensor in addition to the location on the electrode system formed on the electrically insulating base plate unless the effects of the present invention would be lost. For example, the reaction layer may be located anywhere in the biosensor apart from the electrode system on the base plate. The biosensor in accordance with the present invention further comprises a cover member. The cover member is combined with the base plate to form, between the cover member and the base plate, a sample solution supply pathway for supplying a sample solution to the electrode system. The reaction layer may be located on an exposed side of the cover member to the sample solution supply pathway.

[0033] As to the measurement of oxidation current, there are two methods: one is a two-electrode system comprising only a working electrode and a counter electrode and the other is a three-electrode system further comprising a reference electrode in addition to the two electrodes. The latter facilitates more precise and accurate measurement.

[0034] As mentioned before, the present invention also relates to a method for stabilizing glucose dehydrogenase for use in glucose sensors by adding one of the above-exemplified additives to PQQ-GDH. The present invention does not limit the method of addition to particular one and any method can be applied unless it damages the effects of the present invention.

[0035] The present invention is also directed to a glucose dehydrogenase composition for use in glucose sensors

that is composed of PQQ-GDH plus the additive.

[0036] The stabilized glucose dehydrogenase composition in accordance with the present invention may further contain other stabilizer to the extent not impairing the effects of the present invention, in addition to the above-mentioned additive.

5 [0037] Applicable examples of stabilizer for this purpose include a metal salt, a protein, an amino acid, a sugar, an organic acid, a surfactant and so on.

[0038] The metal salt may be exemplified as a halogenide or a halide of calcium, strontium or manganese, their sulfate or nitrate.

10 [0039] Preferred protein is one which does not have any adverse effect on the enzyme activity. Examples of such protein are bovine serum albumin (BSA), egg albumin and gelatin.

[0040] Applicable amino acid may be exemplified as glycylglycine and polylysine, in addition to general amino acids such as lysine, histidine and glutamic acid. Above all, a highly water-soluble amino acid is preferable.

[0041] As the sugar, any sugar may be used regardless of the species and may be exemplified as monosaccharide, disaccharide, oligosaccharide and polysaccharide. Their derivatives may also be applicable. More specific examples
15 are glucose, fructose, galactose, mannose, xylose, sucrose, lactose, maltose, trehalose, malt triose, maltosyl cyclodextrin, α -cyclodextrin, β -cyclodextrin, γ -cyclodextrin, dextrin, amylose, glycogen, starch, inulin, glucosamine, inositol, mannitol, sorbitol, ribitol and deoxyglucose.

[0042] Examples of organic acid include α -ketoglutaric acid, malic acid, fumaric acid, gluconic acid, cholic acid, and deoxycholic acid.

20 [0043] Preferable surfactant is non-ionic one.

[0044] Among others, boric acid, borax, potassium chloride, sodium chloride, ammonium sulfate, glycerol, Ficoll, EDTA (ethylenediaminetetraacetic acid), EGTA, DTT (dithiothreitol), DTE (dithioerythritol), GSH (glutathione) or 2-mercaptoethanol may also be applicable.

25 [0045] A preferable amount range of those stabilizers is 0.0001 to 1.0 part by weight per 1.0 part by weight of glucose dehydrogenase.

[0046] The glucose dehydrogenase composition of PQQ-GDH added with, if necessary, the above-mentioned stabilizer in addition to the additive in accordance with the present invention has low cost and can retain its activity without adverse influence on the intrinsic property of the enzyme.

30 [0047] The coenzyme pyrrolo-quinoline quinone as adopted by the present invention may be derived from any source.

[0048] Now, the measurement method of the activity of PQQ-GDH of the present invention will be described.

[0049] The reagent used is a mixed reagent solution of 50 mM PIPES buffer solution, 0-2 mM PMS (pH 6.5), 0.2 mM NTB, 30.6 mM glucose and 0.19% Triton X-100.

35 [0050] After heating 3 ml of the mixed reagent solution at 37 °C for about 5 min, a PQQ-GDH solution was added to the heated mixed reagent solution at 0.1 ml and the resultant solution was gently stirred.

[0051] Subsequently, the solution thus obtained was measured for its absorbance using a spectrophotometer at a controlled temperature of 37 °C and the absorbance was recorded for 5 minutes. Water was used as control. Then, changes in absorbance per min was calculated from a linear portion on the recorded spectral data. Double blind test was made by measuring absorbance of the mixed reagent solution added with mere distilled water in place of PQQ-GDH solution. The amount of enzyme which produces diformazan at 1/2 μ M per min as measured by the above method
40 was defined as one unit.

[0052] In the following, the present invention will be described more specifically by way of concrete examples. However, the present invention is not limited only to those examples.

45 Examples

[0053] FIG. 1 is a schematic plan view of a biosensor in accordance with one example of the present invention with an omission of the reaction layer.

50 [0054] As shown in the figure, a silver paste is printed on an electrically insulating base plate 1 made of polyethylene terephthalate using the known screen printing method in order to form leads 2 and 3. Then, a conductive carbon paste containing a resin binder is printed on the base plate 1 to form a working electrode 4. The working electrode 4 is in contact with the lead 2. The base plate 1 is further formed thereon with an insulating layer 6 by printing an insulating paste. The insulating layer 6 surrounds the periphery of the working electrode 4 to hold the exposed area of the working electrode 4 constant. Then, a ring-like counter electrode 5 is formed on the base plate 1 by printing the same conductive
55 carbon paste containing a resin binder as above such that the paste has a contact with the lead 3.

[0055] FIG. 2 is a schematic longitudinal cross-sectional view of the biosensor of FIG. 1. On the base plate 1 as shown in FIG. 1, a hydrophilic polymer layer 7 of carboxymethyl cellulose is formed, on which a reaction layer 8 containing PQQ-GDH plus the additive is further formed.

Example 1

[0056] A 0.5 wt% aqueous sodium salt solution of a hydrophilic polymer, carboxymethyl cellulose (hereinafter abbreviated to "CMC"), was dropped on the electrode system on the base plate 1 in FIG. 1 and dried for 10 min in a warm air drier at 50 °C to form the CMC layer 7. Then, a mixed solution dissolving 5,000 U PQQ-GDH, 20 µM potassium hydrogen phthalate and 50 µM potassium ferricyanide in 1 ml water was dropped on the CMC layer 7 and dried to form the reaction layer 8. In this way, the glucose sensor of Example 1 was produced.

[0057] Then, aqueous solutions containing various concentrations of glucose were prepared as sample solutions. Each of the sample solutions thus prepared was dropped on the reaction layer 8. Upon supply of the glucose sample solution to the reaction layer, glucose contained in the sample solution was oxidized by PQQ-GDH present in the reaction layer 8. At that time, potassium ferricyanide in the reaction layer was reduced to potassium ferrocyanide.

[0058] One minute after dropping the sample solution, a voltage of +0.5 V was applied onto the working electrode 4 using the counter electrode 5 as reference in order to reoxidize potassium ferrocyanide. Five seconds after voltage application, current flowing across the working and the counter electrodes 4 and 5 was measured.

[0059] Current values were obtained from all of the sample solutions containing various concentrations of glucose in the same manner as noted above. Finally, a graph showing response characteristics of the glucose sensor to the sample solutions was prepared by plotting the glucose concentration on the X axis and the current value on the Y axis. The results are shown in FIG. 3.

[0060] An identical biosensor was produced in the same manner as described above and preserved at room temperature for 6 months in order to prepare a graph showing its response characteristics after 6-month preservation. The results are also given in FIG. 3.

[0061] As evident from FIG. 3, the biosensors of Example 1 produce an extremely low blank value. It is also noted that there is a certain correlation between the glucose concentration and the current value with sharp linearity.

[0062] The sensor response characteristics 6 months after production as shown by "Ex.1-2" were almost unchanged compared to those immediately after production as shown by "Ex.1-1". This indicates that the biosensors of Example 1 can well stand stable against preservation.

Comparative Example 1

[0063] Another glucose sensor was produced in the same manner as in Example 1, except for the use of potassium phosphate in place of potassium hydrogen phthalate. Then, a graph of sensor response characteristics immediately after production as shown by "Com.Ex.1-1" and after 6 month-preservation as shown by "Com.Ex.1-2" was prepared in the same manner as in Example 1. The results are shown in FIG. 3.

[0064] As apparent from FIG. 3, the glucose sensor of Comparative Example 1 produces a high blank value. The response current value of the sensor is higher than the real current value reflecting the glucose concentration when the glucose concentration in the sample solution is lower than 110 mg/dl. When the glucose concentration in the sample solution is higher than 110 mg/dl, the response current value is lower in the glucose sensor of Comparative Example 1 than that of Example 1. The linear correlation between the glucose concentration and the current value immediately after production is also lower.

[0065] The linear correlation further decreased after 6-month preservation compared to that immediately after production. As such, the glucose sensor of Comparative Example 1 had poor preservation characteristics.

Comparative Example 2

[0066] Another glucose sensor was produced in the same manner as in Example 1, except for omission of potassium hydrogen phthalate. Then, a graph of response characteristics of the sensor immediately after production and after 6-month preservation was prepared in the same manner as in Example 1.

[0067] The results showed that the sensor of Comparative Example 2 produced a surprisingly high blank value and low increases in the current value in response to increases in the substrate concentration. The enzyme lost its enzyme activity after 6-month preservation of the sensor and there was almost no change in the current value in response to increased substrate concentrations.

Example 2

[0068] In this example, a glucose sensor was produced in the same manner as in Example 1, except for omission of the CMC layer 7 on the electrode system. Then, a graph of response characteristics of the sensor immediately after production and after 6-month preservation was prepared in the same manner as in Example 1.

[0069] The results showed a certain correlation between the glucose concentration and the current value with sat-

isfactory linearity. The sensor was low in blank value. Moreover, the sensor response characteristics 6 months after production were almost unchanged compared to those immediately after production. This indicates satisfactory stability of the sensor of Example 2 against preservation.

Examples 3 to 10

[0070] In these examples, glucose sensors were produced in the same manner as in Example 1 by using maleic acid (Example 3), succinic acid (Example 4), triethanol amine hydrochloride (Example 5), sodium dihydrogen citrate (Example 6), dimethyl glutaric acid (Example 7), 2-(N-morpholino)ethane sulfonic acid (Example 8), tris(hydroxyethyl)glycine (Example 9) or tris(hydroxymethyl)aminomethane (Example 10) in place of potassium hydrogen phthalate. Then, graphs of response characteristics of the sensors immediately after production as shown by "Ex.3-1 to Ex.10-1" and after 6-month preservation as shown by "Ex.3-2 to Ex.10-2" were prepared in the same manner as in Example 1. The results obtained from the sensors are shown in FIG. 4 to FIG. 11.

[0071] FIG. 4 to FIG. 11 indicate very low blank values and a certain correlation between the glucose concentration and the current value. The sensors were highly responsive, demonstrating satisfactory linearity. Moreover, the sensor response characteristics 6 months after production were almost unchanged compared to those immediately after production. This indicates satisfactory stability of the sensors of Examples 3 to 10 against preservation.

Examples 11 to 18

[0072] In these examples, glucose sensors were produced in the same manner as in Examples 3 to 10, except for omission of the CMC layer 7 on the electrode system. Then, graphs of response characteristics of the sensors immediately after production and after 6-month preservation were prepared similarly.

[0073] The results indicate a certain correlation between the glucose concentration and the current value with satisfactory linearity. The blank value was also very low in all the sensors. Moreover, the sensor response characteristics 6 months after production were almost unchanged compared to those immediately after production. This indicates satisfactory stability of the sensors of Examples 11 to 18 against preservation.

Example 19

[0074] In this example, 10 U/ml of the PQQ-GDH in accordance with the present invention was dissolved in various additives (20 mM) each containing 1 mM calcium chloride (which will be called "buffer solutions") and stored at 37 °C for 3 days to examine the residual enzyme activity (more specifically, ratio of remaining enzyme activity of the PQQ-GDH to that immediately after being dissolved in either buffer solution). Calcium chloride was omitted when the buffer was potassium phosphate buffer solution.

[0075] Table 1 lists the residual enzyme activity of PQQ-GDH dissolved in the various buffer solutions.

Table 1

Buffer solution	pH	Residual activity (%)
Potassium hydrogen phthalate	6.0	100
Maleic acid	6.5	100
Succinic acid	6.0	100
Triethanol amine	7.0	100
Sodium dihydrogen citrate	6.5	100
Dimethyl glutaric acid	6.5	100
Tricine	7.5	95.4
Imidazole	7.5	100
Colicin	6.5	96.1
Tris hydrochloride	7.5	63.4
Potassium phosphate	6.5	44.3

[0076] Table 1 indicates that all the additives in accordance with the present invention produce better stability than the conventional potassium phosphate buffer solution and tris hydrochloride buffer solution which are widely applied additives.

Example 20

[0077] In this example, the PQQ-GDH in accordance with the present invention was dissolved in a variety of additives containing 1 mM calcium chloride in addition to BSA (which will be called buffer solutions). The mixing ratio of BSA was 0.3 part by weight to 1.0 part by weight of PQQ-GDH. The solution thus prepared was lyophilized (=freeze-dried) and stored at 37°C for 1 week to examine the residual enzyme activity (more specifically, ratio of remaining enzyme activity of the PQQ-GDH to that immediately after being dissolved in either buffer solution). The results are shown in Table 2.

Table 2

Buffer solution	pH	Residual activity (%)
Tris hydrochloride	7.5	22.1
Potassium phosphate	6.5	66.2
Potassium hydrogen phthalate	6.0	83.2
Maleic acid	6.5	72.1
Succinic acid	6.0	80.5

[0078] Table 2 indicates that all the additives in accordance with the present invention are superior to the widely used conventional potassium phosphate buffer solution and tris hydrochloride buffer solution in securing stable activity of the enzyme composition prepared by a freeze-drying method.

[0079] As discussed above, the present invention can provide a high performance glucose sensor which well stands long-term preservation and has a low blank value. The present invention can also provide a glucose dehydrogenase composition bound with pyrrolo-quinoline quinone as coenzyme for use in glucose sensors, the composition being more stable than the conventional glucose dehydrogenase composition.

[0080] Although the present invention has been described in terms of the presently preferred embodiments, it is to be understood that such disclosure is not to be interpreted as limiting. Various alterations and modifications will no doubt become apparent to those skilled in the art to which the present invention pertains, after having read the above disclosure. Accordingly, it is intended that the appended claims be interpreted as covering all alterations and modifications as fall within the true spirit and scope of the invention.

Claims

1. A glucose sensor comprising:

an electrically insulating base plate,
 an electrode system including at least a working electrode and a counter electrode formed on said base plate,
 and
 a reaction layer which is formed in contact with or in the vicinity of said electrode system and contains at least glucose dehydrogenase whose coenzyme is pyrrolo-quinoline quinone,
 wherein said reaction layer further contains at least one additive selected from the group consisting of phthalic acid, a phthalate, maleic acid, a maleate, succinic acid, a succinate, triethanol amine, a triethanol amine salt, citric acid, a citrate, dimethyl glutaric acid, 2-(N-morpholino)ethane sulfonic acid, a 2-(N-morpholino)ethane sulfonate, tris (hydroxymethyl) glycine, a tris (hydroxymethyl)glycine salt, tris(hydroxymethyl)aminomethane, a tris (hydroxymethyl) aminomethane salt, imidazole, and colicin.

2. The glucose sensor in accordance with claim 1, wherein said glucose dehydrogenase is coated with said additive.

3. A method for stabilizing glucose dehydrogenase for use in glucose sensors, wherein at least one additive is added to glucose dehydrogenase whose coenzyme is pyrrolo-quinoline quinone, said additive being selected from the group consisting of phthalic acid, a phthalate, maleic acid, a maleate, succinic acid, a succinate, triethanol amine,

a triethanol amine salt, citric acid, a citrate, dimethyl glutaric acid, 2-(N-morpholino)ethane sulfonic acid, a 2-(N-morpholino)ethane sulfonate, tris(hydroxymethyl)glycine, a tris(hydroxymethyl)glycine salt, tris(hydroxymethyl)aminomethane, a tris(hydroxymethyl)aminomethane salt, imidazole, and colicin.

- 5 4. A glucose dehydrogenase composition for use in glucose sensors, said composition containing glucose dehydrogenase whose coenzyme is pyrrolo-quinoline quinone and at least one additive selected from the group consisting of phthalic acid, a phthalate, maleic acid, a maleate, succinic acid, a succinate, triethanol amine, a triethanol amine salt, citric acid, a citrate, dimethyl glutaric acid, 2-(N-morpholino)ethane sulfonic acid, a 2-(N-morpholino)ethane sulfonate, tris (hydroxymethyl)glycine, a tris(hydroxymethyl)glycine salt, tris(hydroxymethyl)aminomethane, a
10 tris(hydroxymethyl)aminomethane salt, imidazole, and colicin.

15

20

25

30

35

40

45

50

55

FIG. 1

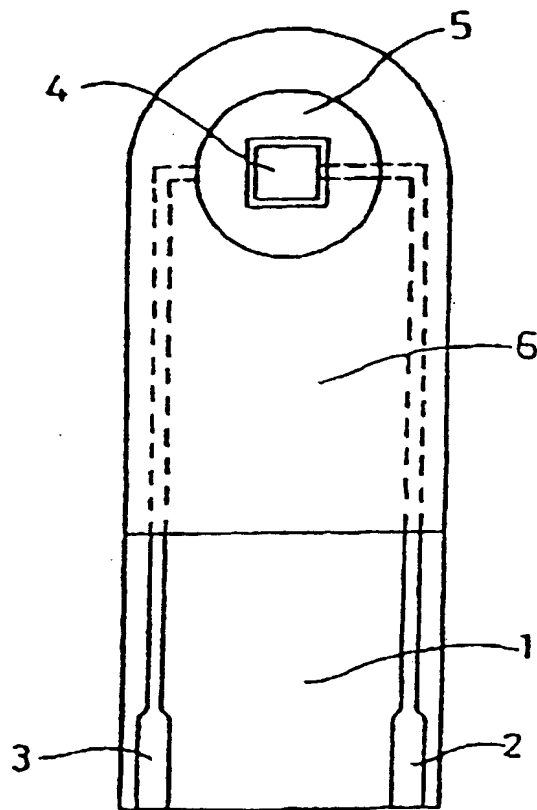


FIG. 2

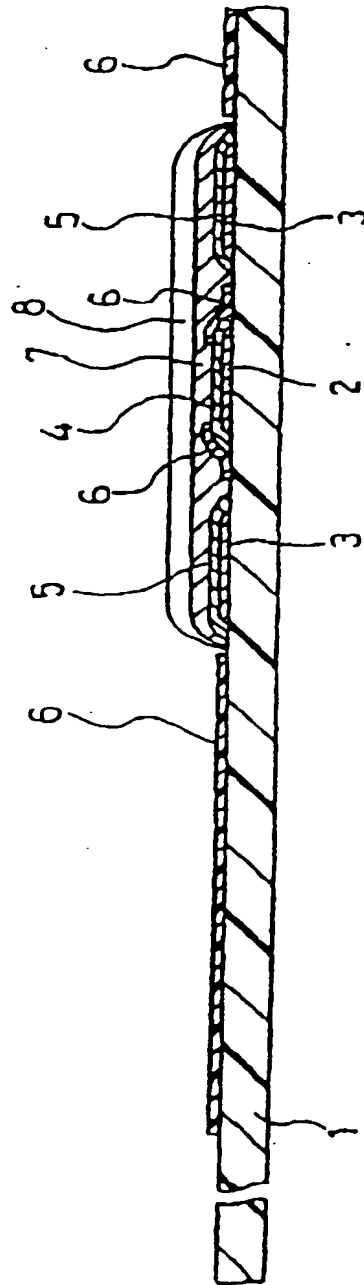


FIG. 3

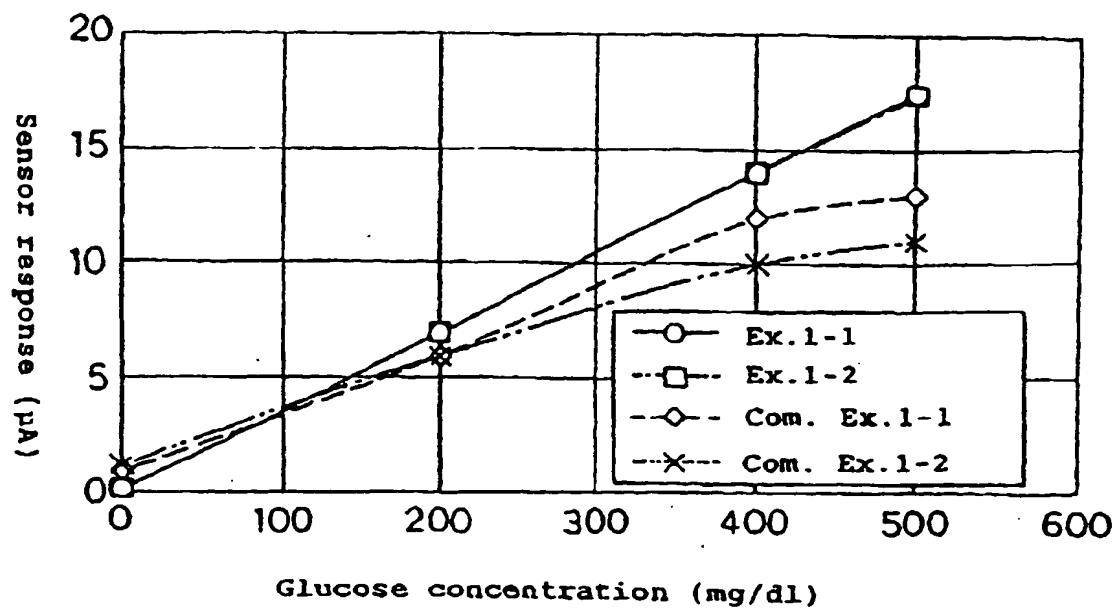


FIG. 4

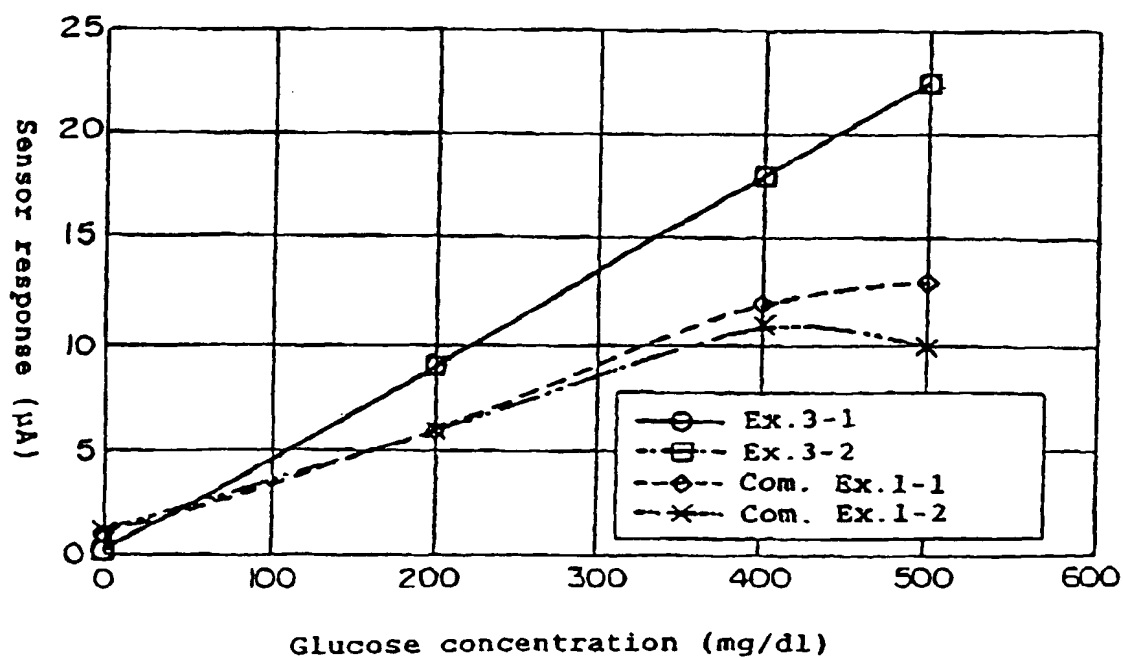


FIG. 5

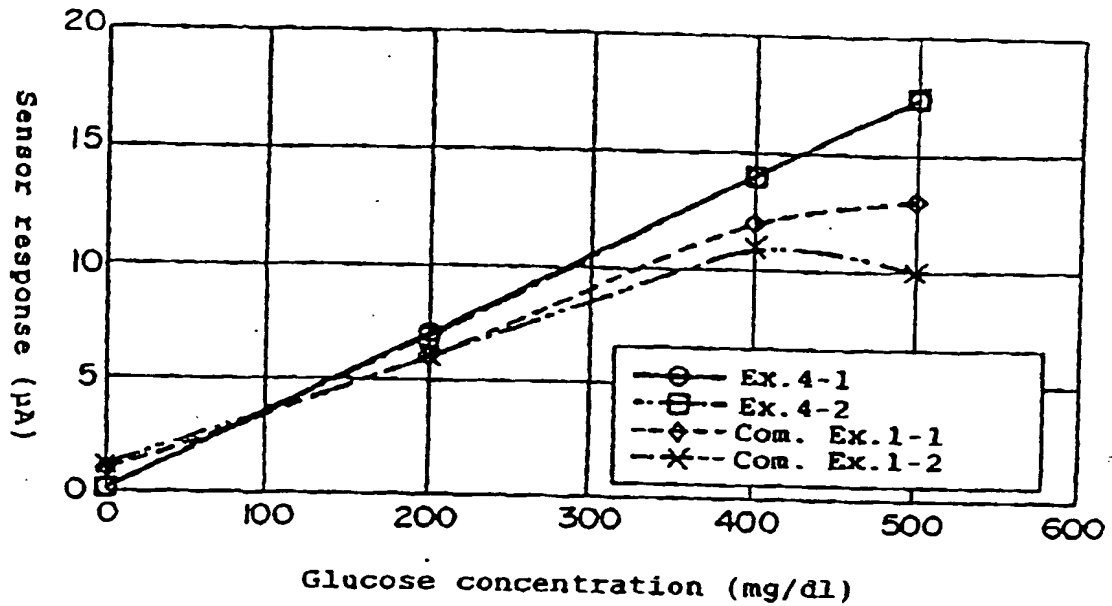


FIG. 6

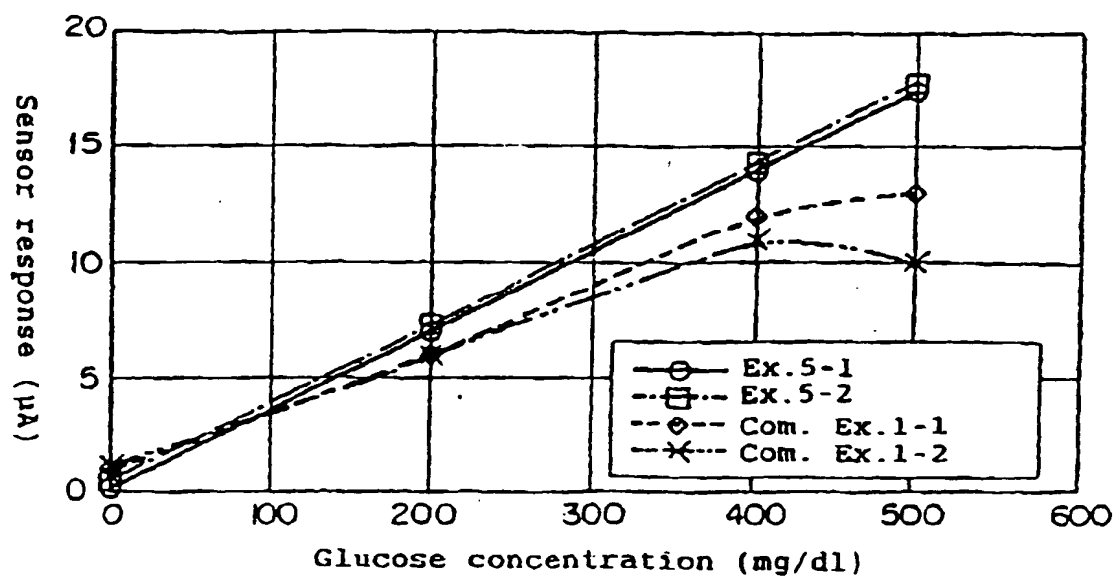


FIG. 7

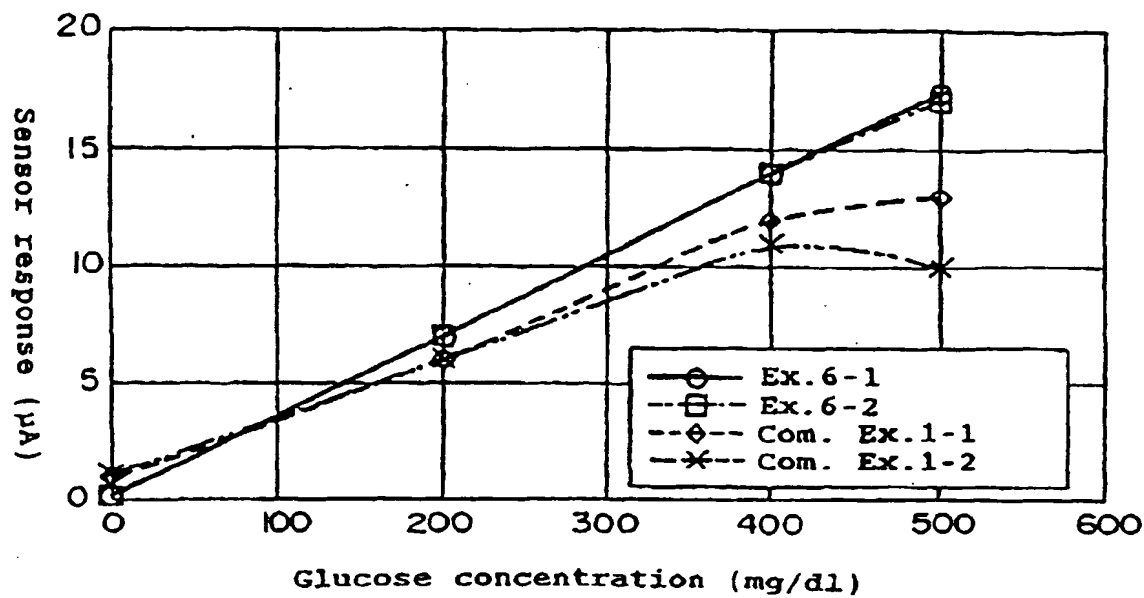


FIG. 8

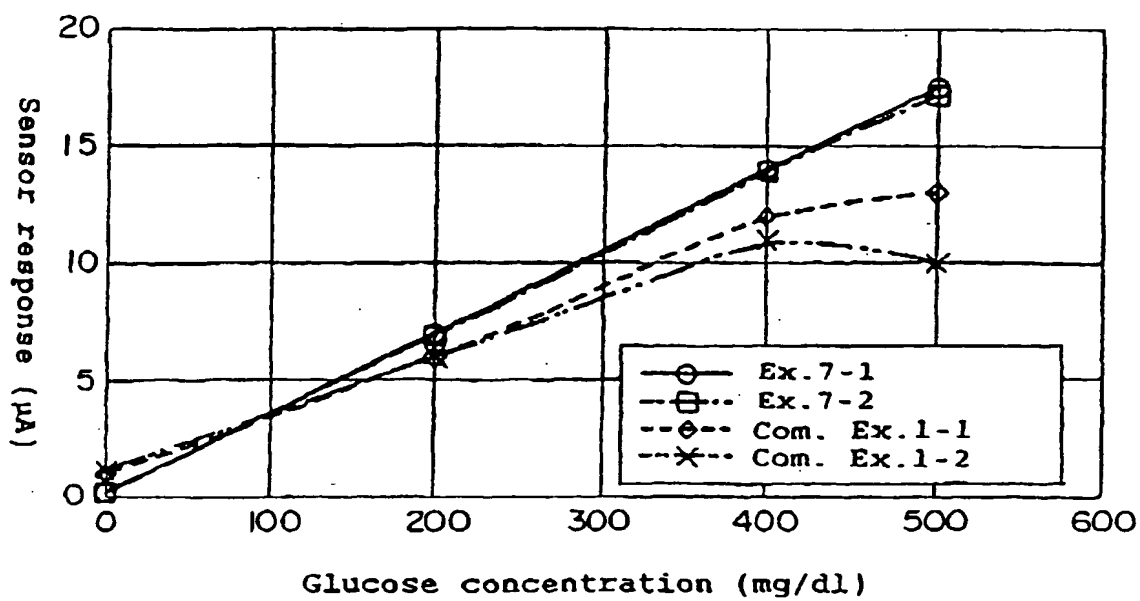


FIG. 9

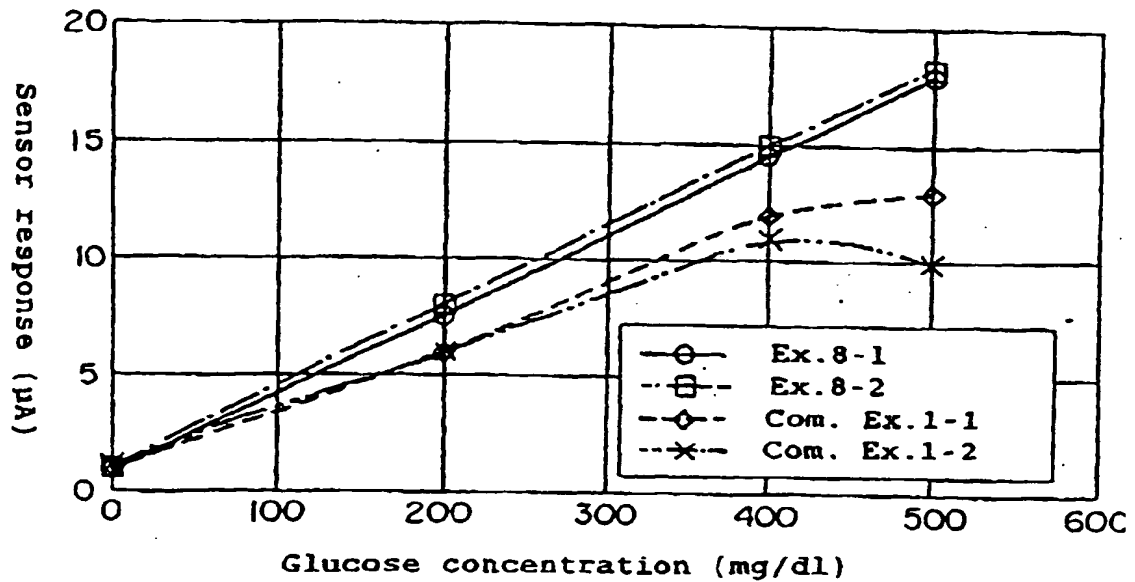


FIG. 10



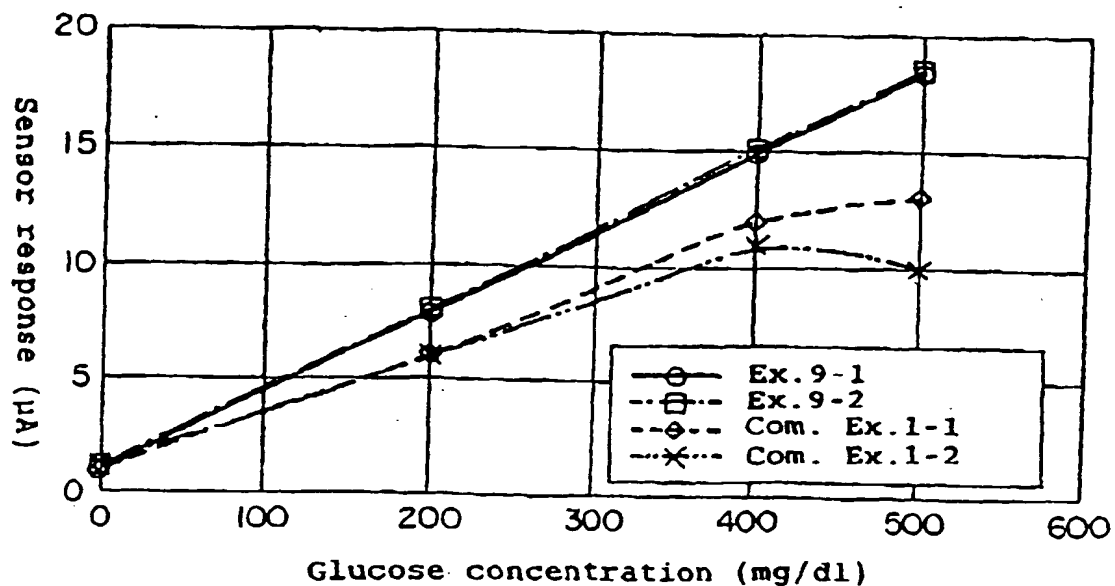


FIG. 11

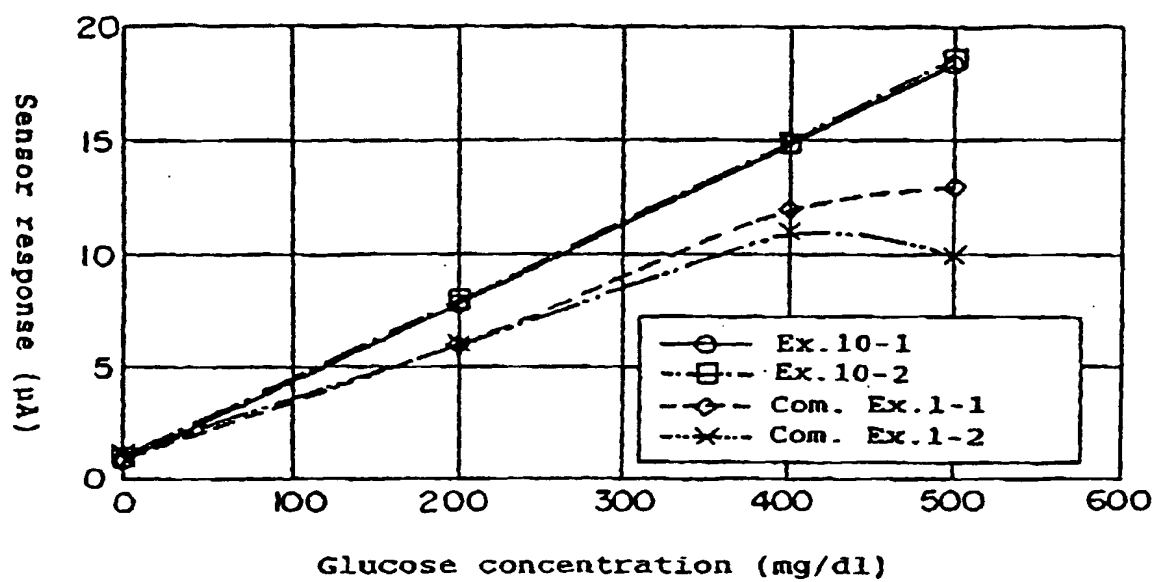



(19)

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 992 589 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
12.09.2001 Bulletin 2001/37

(51) Int Cl.7: **C12Q 1/00, G01N 27/327**

(43) Date of publication A2:
12.04.2000 Bulletin 2000/15

(21) Application number: **99119014.1**

(22) Date of filing: **28.09.1999**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: **29.09.1998 JP 27615398**
27.07.1999 JP 21270399

(71) Applicant: **MATSUSHITA ELECTRIC INDUSTRIAL
CO., LTD.**
Kadoma-shi, Osaka 571-8501 (JP)

(72) Inventors:
• **Yugawa, Keiko**
Nara-shi, Nara 631-0041 (JP)
• **Yoshioka, Toshihiko**
Hirakata-shi, Osaka 573-0035 (JP)


• **Nankai, Shiro**
Hirakata-shi, Osaka 573-0071 (JP)
• **Iwata, Junko**
Onsen-gun, Ehime 791-0221 (JP)
• **Miyazaki, Shoji**
Matsuyama-shi, Ehime 791-8032 (JP)
• **Baba, Hideyuki**
Matsuyama-shi, Ehime 790-0923 (JP)
• **Takeshima, Seiji,**
c/o Toyo Boseki Kabushiki Kaisha
Tsuruga-shi, Fukui 914-0047 (JP)

(74) Representative: **Dr. Elisabeth Jung**
Dr. Jürgen Schirdewahn Dipl.-Ing. Claus
Gernhardt
Clemensstrasse 30
80803 München (DE)

(54) **Glucose sensor**

(57) The present invention provides a high performance glucose sensor which can demonstrate high stability against preservation and produces only a low blank value. The glucose sensor comprises an electrically insulating base plate, an electrode system formed on the base plate, and a reaction layer which is formed in contact with or in the vicinity of the electrode system and contains at least a glucose dehydrogenase whose coenzyme is pyrrolo-quinoline quinone, the reaction layer further containing an additive such as phthalic acid.

FIG. 1

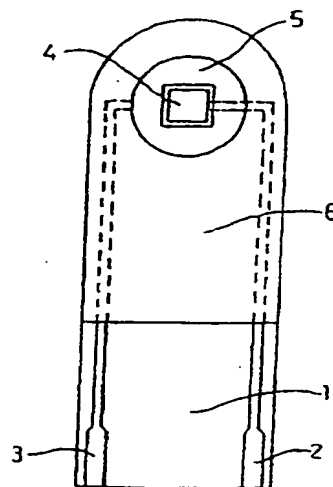

EP 0 992 589 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 99 11 9014

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	EP 0 357 027 A (KANZAKI PAPER MFG CO LTD) 7 March 1990 (1990-03-07) * the whole document *	1,3,4	C12Q1/00 G01N27/327
A	US 5 378 628 A (GRAETZEL MICHAEL ET AL) 3 January 1995 (1995-01-03) * abstract *	1,3,4	
A	US 5 804 047 A (CLARK SUSAN ANNE ET AL) 8 September 1998 (1998-09-08) * the whole document *	1,3,4	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			C12Q G01N
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 20 July 2001	Examiner Moreno, C
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date U : document cited in the application I : document cited for other reasons A : member of the same patent family, corresponding document</p>			

EP 0 992 589 A3

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 99 11 9014

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

20-07-2001

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0357027	A	07-03-1990	JP 2064447 A	05-03-1990
			JP 2504811 B	05-06-1996
			JP 2066440 A	06-03-1990
			JP 2504812 B	05-06-1996
			DE 68922550 D	14-06-1995
			US 5081015 A	14-01-1992
US 5378628	A	03-01-1995	FR 2673289 A	28-08-1992
			AU 656360 B	02-02-1995
			BG 96988 A	31-03-1994
			CZ 9203165 A	14-04-1993
			DE 69216319 D	13-02-1997
			DE 69216319 T	03-07-1997
			EP 0526602 A	10-02-1993
			FI 924726 A	19-10-1992
			NO 924020 A	16-11-1992
			PL 169972 B	30-09-1996
			SK 316592 A	12-04-1995
			AT 147107 T	15-01-1997
			AU 1221992 A	15-09-1992
			CA 2080840 A,C	22-08-1992
			WO 9214836 A	03-09-1992
			HU 66200 A,B	28-10-1994
			JP 2770250 B	25-06-1998
US 5804047	A	08-09-1998	JP 6090754 A	05-04-1994
			DE 69319771 D	27-08-1998
			DE 69319771 T	22-04-1999
			EP 0563795 A	06-10-1993
			JP 6078791 A	22-03-1994

EPO TCM 00449

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

This Page Blank (uspto)



P.B.5818 - Patentlaan 2
2280 HV Rijswijk (ZH)
☎ +31 70 340 2040
TX 31651 epo nl
FAX +31 70 340 3016

Europäisches
Patentamt

Zweigstelle
in Den Haag
Recherchen-
abteilung

European
Patent Office

Branch at
The Hague
Search
division

Office européen
des brevets

Département à
La Haye
Division de la
recherche

Nachshen, Neil Jacob
D Young & Co
21 New Fetter Lane
London EC4A 1DA
GRANDE BRETAGNE

RECEIVED
JUN 01 2004

JUN 01 2004

OFFICE OF PATENTIONS

Datum/Date

31.03.04

Zeichen/Ref./Réf.

P011262EP NJN

Anmeldung Nr./Application No./Demande n°/Patent Nr./Patent No./Brevet n°.

00963053.4-1223-JP0006853

Anmelder/Applicant/Demandeur/Patentinhaber/Proprietor/Titulaire

MATSUSHITA ELECTRIC INDUSTRIAL CO., LTD.

COMMUNICATION

The European Patent Office herewith transmits as an enclosure the European search report for the above-mentioned European patent application.

If applicable, copies of the documents cited in the European search report are attached.

☐ Additional set(s) of copies of the documents cited in the European search report is (are) enclosed as well.

REFUND OF THE SEARCH FEE

If applicable under Article 10 Rules relating to fees, a separate communication from the Receiving Section on the refund of the search fee will be sent later.



This Page Blank (uspto)



European Patent
Office

SUPPLEMENTARY
EUROPEAN SEARCH REPORT

Application Number
EP 00 96 3053

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
P, X, L	EP 0 992 589 A (MATSUSHITA ELECTRIC IND CO LTD) 12 April 2000 (2000-04-12) * paragraphs '0015!', '0029!', '0036!'-'0038!', '0042!' * L:Priority	1-3, 5	G01N27/327 C12Q1/00 G01N33/487
A	EP 0 872 728 A (MATSUSHITA ELECTRIC IND CO LTD) 21 October 1998 (1998-10-21) * figures 1,4; example 1 *	1, 3, 5	RECEIVED JUN 01 2004
A	WO 98 35225 A (TOMASCO MICHAEL F ;HELLER ADAM (US); HELLER E & CO (US); SAY JAMES) 13 August 1998 (1998-08-13) * figure 10; example 3; table 3 *	1, 5	OFFICE OF PATENTS
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			C12Q G01N
The supplementary search report has been based on the last set of claims valid and available at the start of the search.			
Place of search THE HAGUE		Date of completion of the search 18 March 2004	Examiner Weber, P
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

2

EPO FORM 1503 03.82 (P04C04)

This Page Blank (uspto)

JUN 01 2004

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

OFFICE OF THE EUROPEAN PATENT OFFICE
EP 00 96 3053

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

18-03-2004

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
EP 0992589	A	12-04-2000	JP	2000171428 A	23-06-2000
			CN	1250161 A ,B	12-04-2000
			EP	0992589 A2	12-04-2000
EP 0872728	A	21-10-1998	CN	1219590 A ,B	16-06-1999
			DE	69806535 D1	22-08-2002
			DE	69806535 T2	13-03-2003
			EP	0872728 A1	21-10-1998
			JP	3494398 B2	09-02-2004
			JP	11201932 A	30-07-1999
			US	6059946 A	09-05-2000
WO 9835225	A	13-08-1998	AT	227844 T	15-11-2002
			AU	6157898 A	26-08-1998
			DE	69809391 D1	19-12-2002
			DE	69809391 T2	10-07-2003
			DK	958495 T3	10-03-2003
			EP	0958495 A1	24-11-1999
			ES	2184236 T3	01-04-2003
			JP	3394262 B2	07-04-2003
			JP	2000509507 T	25-07-2000
			JP	2003028826 A	29-01-2003
			WO	9835225 A1	13-08-1998
			US	6143164 A	07-11-2000
			US	6120676 A	19-09-2000
			US	6576101 B1	10-06-2003
			US	2003201194 A1	30-10-2003
			US	6551494 B1	22-04-2003
			US	6607658 B1	19-08-2003

This Page Blank (uspto)